
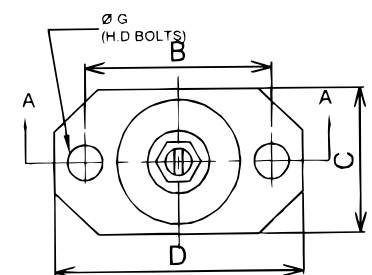
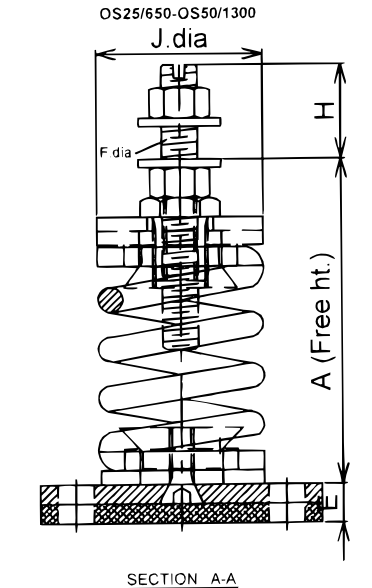



EFOS 25MM & 50MM DEFLECTION OPEN SPRING MOUNT

PART NO.	COLOUR CODE	RATED LOAD (KG)	DEFLECTION AT RATED	DIMENSIONS (mm)								
				A	B	C	D	E	F	G	H	J
EFOS25/30	Yellow	30	25									
EFOS25/60	Green	60	25									
EFOS25/100	Blue	100	25	115	85	70	110	10	M10	10	20	55
EFOS25/160	White	160	25									
EFOS25/250	Red	250	25									
EFOS25/200	Red	200	25									
EFOS25/300	Purple	300	25									
EFOS25/400	Grey	400	25									
EFOS25/500	Orange	500	25	160	110	100	140	11	M16	12	27	75
EFOS25/600	Brown	600	25									
EFOS25/700	Orange	700	25									
EFOS25/800	Black	800	25									
EFOS50/100	Yellow	100	50									
EFOS50/200	Green	200	50									
EFOS50/300	Blue	300	50	188	110	100	140	11	M16	12	27	75
EFOS50/400	White	400	50									
EFOS50/500	Black	500	50									
EFOS25/650	Yellow	650	26									
EFOS25/850	Green	850	27	182	110	100	140	11	M16	12	27	75
EFOS25/1050	Blue	1050	26									
EFOS25/1250	White	1250	26									
EFOS25/1300	Red	1300	27									
EFOS25/1600	Purple	1600	25	225	210	150	250	18	M24	16	51	75
EFOS25/2000	Grey	2000	26									
EFOS25/2300	Brown	2300	29									
EFOS50/510	Black/Purple	510	51									
EFOS50/760	Black/Grey	760	51	240	210	150	250	18	M20	16	42	80
EFOS50/1000	Black/Orange	1000	50									
EFOS50/1300	Black/Brown	1300	53									

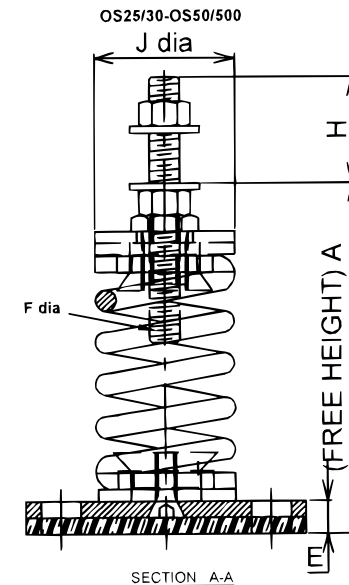

Specifications

- Spring Elements and Base Plate are Powder Coated.
- Color Coded 25mm & 50mm deflection springs have 50% overload Capacity.
- Unique expanding rubber at fixing of spring provides high frequency attenuation and robust mechanical attachment.
- Springs designed according to BS 1726 Part 1 – 1987.
- 6mm thick Rubber Pad provided at base.
- All hardware is Zinc Electrogalvanized.
- Fully height adjustable.



Model No. : EFOS		Easyflex ™		
DRN BY	Varun Kumar	OWNER :		
DRN NO.	KIC/AE/20-21/05	KANWAL INDUSTRIAL CORPORATION B - 168 , PHASE II , NOIDA - 201305, U.P. INDIA		
APRD BY	DS			CHKD BY
DATE	19/11/2020			

