


Easyflex Type EFRO mounts are very versatile and can be ideal for a wide range of applications where simple and compact anti-vibration mountings are required. They are suitable for loads in shear, as well as in compression. These mounts are used in an extensive range of applications including compressors, generators, air conditioners, pumps, fans, motors, laboratory equipment, scales, etc.

Type 'EFRO' mounts are comprised of an elastomer bonded between two metal plates. The dynamic and static properties of the unit are determined by the composition and configuration of the elastomer. High strength bonds are specially compounded elastomers provide high load carrying capacity and assures long life.

Simplicity of design and unitized construction provide low cost mounting systems which are compact, light-weight, easy to install and maintenance free.

SIZE	TYPE	MAX LOAD Kg	STATIC DEFLECTION (mm)	D Ø T		THREAD SIZE AND STUD LENGTH OR THD. DEPTH.	
				BOLT	NUT		
EFRO-13	A	4.5	1.0	13	13	3/16" BSWx13L	3/6" BSWx4 DEEP
EFRO-19	A	4.5	1.0	13	13	3/16" BSWx13L	3/6" BSWx4 DEEP
EFRO-16	A	4.5	1.0	13	13	3/16" BSWx13L	3/6" BSWx4 DEEP
	A	18	3.0	19	19		
EFRO-19	B	25	3.0	19	19	1/4" BSWx19L	1/4" BSWx6 DEEP
	A	6.0	3.0	20	25		
EFRO-20	B	6.0	3.0	20	25		
	A	16	1.5	25	19		
	B	22	1.5	25	19	5/16" BSWx22L	5/18"BSWx6 DEEP
	A	30	3.5	25	20		
EFRO-25	B	45	3.5	25	20	M6x1Px13L	M6x1Px6 DEEP
EFRO-25	A	50	3.5	25	22	M6x1Px13L	M6x1Px6 DEEP
	A	37	3.5	25	30		
EFRO-25	B	52	3.5	25	30	M8x1.25Px20L	M8x1.25Px6 DEEP
EFRO-30	A	64	3.5	30	22	M8x1.25Px25L	M8x1.25Px6 DEEP
EFRO-30	A	22	3.0	30	30	M8x1.25Px21L	M8x1.25Px6 DEEP
EFRO-35	A	64	3.0	35	22	3/8" BSWx38L	3/8"xBSWx6 DEEP
	A	16	1.5	35	25		
	B	21	1.5	35	25	3/8" BSWx38L	3/8"xBSWx6 DEEP
	A	70	4.0	38	25		
EFRO-38	B	110	4.0	38	25	M8x1.25Px17L	M8x1.25Px6 DEEP
	A	50	6.0	38	38		
EFRO-38	B	67	6.0	38	38	M8x1.25Px17L	M8x1.25Px10 DEEP
EFRO-40	B	146	4.5	40	28	M10x1.25Px25L	M10x1.5Px6 DEEP
EFRO-40	B	60	5.0	40	30	M8x1.25Px25L	M8x1.25Px6 DEEP
	A	43	6.0	40	40		
EFRO-40	B	59	6.0	40	40	M10x1.5Px38L	M10x1.5Px10 DEEP
	A	65	5.0	50	40		
EFRO-50	B	110	5.0	50	40	M10x1.5Px22L	M10x1.5Px12 DEEP
EFRO-50	B	106	7.0	50	45	M10x1.5Px22L	M10x1.5Px12 DEEP
EFRO-50	A	76	7.0	50	50	M10x1.5Px22L	M10x1.5Px12 DEEP

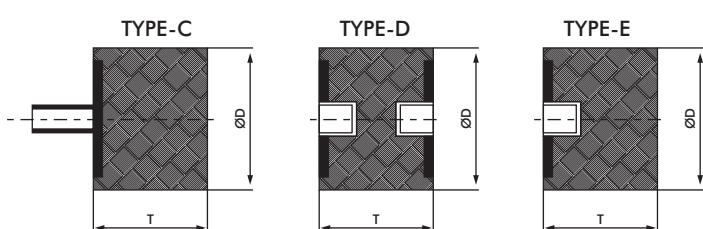

■ Type C,D,E available as per customer requirement.

- Due to policy of continual improvement, the specifications are subject to change without prior notice.
- Measurements are subject to 5% tolerance.
- To achieve good sound suppression do not over load fitting.